





SKU: KG5023/5028

-  Biogas & Slurry Knife Gate Valve - Unidirectional
-  Biogas & Gülle Plattenschieber - einfachgerichtet
-  Biogás y válvula de puerta del cuchillo de lechada - unidireccional
-  Biogaz et lisier Vanne guillotine - unidirectionnelle

Valves[™]
O N L I N E

- 4" - 10" Cast Iron Knife Gate Valve – for Lever Operation
- 4" - 10" Gusseisen -Plattenschieber - für Hebelbetätigung
- 4" - 10" Reparto de la válvula de puerta del cuchillo de Hierro - de palanca de funcionamiento
- 4" - 10" Fonte Vanne guillotine - fonctionnement du levier

To Suit PN10 or ANSI
150 Flanges-AGRI
Standard

Knife Gate Valve with
O-Ring Gaskets.



This standard unidirectional knife gate is equipped with drillings for double flanging, for the fitting with a square flange for agricultural use on tankers. It also has drillings for either PN10 or ANSI 150 flanges.

Due to a special design feature, the gate valve can be classed as "anti-clogging" with the added feature of it being able to be installed in any position.

The valve has a robust protective casing, which completely isolates the moving parts of the gate valve.

Set-up for lever attachments on the valve body, the valve is supplied with stainless steel screws and tie rods to prevent corrosion.

Equipped with an open/closed position indicator.

Simple maintenance: all parts, when the worn is out, parts are easily replaceable.

Complies with the Directive 97/23/CE (PED).



Description

Knife gate is a uni-directional valve and suitable for lever operation. To suit PN10, ANSI 150 and AGRI standard square flanges, 4 hole, cast iron body, stainless steel blade. NBR gaskets and fully enclosed for safety. Position indicator fitted. PN19 rated, temp - 20C to + 90C. Used in the Biogas and Agricultural industries, typical use – Slurry.



Beschreibung

Messergatter ein unidirektionales Ventil und für Hebelbetätigung . Um PN10, ANSI 150 und AGRI Standard quadratischen Flanschen , 4-Loch , Gusskörper , Klinge aus rostfreiem Stahl zu entsprechen. NBR -Dichtungen und voll für die Sicherheit bei. Stellungsanzeige ausgestattet. PN19 gelesen Temp - 20C bis + 90C . Verwendet in der Biogas und Agrarindustrie, typische Verwendung - Slurry .



Descripción





Puerta Knife es una válvula unidireccional y adecuado para el funcionamiento de la palanca. Para adaptarse a bridas PN10, ANSI 150 y AGRI estándar cuadrados, 4 agujeros , cuerpo de hierro fundido, hoja de acero inoxidable . Juntas NBR y completamente cerrado para la seguridad. Indicador de posición equipado . PN19 clasificación , temp - 20C a + 90C . Utilizado en el biogás y las industrias agrícolas, uso típico - lechada .



Description



Porte Knife est une valve unidirectionnelle et apte à l'exploitation de levier . Pour répondre à PN10, ANSI 150 et agro brides carrés standard, 4 trous , corps de fonte , lame en acier inoxydable . Joints NBR et entièrement clos pour la sécurité . Indicateur de position équipé . PN19 évalué , température - 20 ° C à + 90 ° C . Utilisé dans le biogaz et les industries agricoles , utilisation typique - lisier .

Can be supplied with
Handwheel, Pneumatic and
Hydraulic Actuators

-  Biogas & Slurry Knife Gate Valve - Unidirectional
-  Biogas & Gülle Plattenschieber - einfachgerichtet
-  Biogás y válvula de puerta del cuchillo de lechada - unidireccional
-  Biogaz et lisier Vanne guillotine - unidirectionnelle

Cast Iron Knife Gate Valve

Material List		
Item	Part	Description
1	Body	Cast Iron
2	Blade	Stainless Steel
3	Ring	Stainless Steel
4	Gasket	HNBR
5	O-Ring	NBR
6	Gland Packing	Fibre
7	Gasket	NBR
8	Stud	Stainless Steel
9	Gland Packing Box	Cast Iron
10	Washer	Stainless Steel
11	Nut	Stainless Steel
12	Position Indicator	Steel
13	Screw	Stainless Steel
14	Blade Connection	Brass
15	Nut	Steel
16	Stem	Brass
17	Screw	Stainless Steel
18	Clamp	Steel
19	Screw	Stainless Steel
20	Casing	PP
21	Tow Packing	Fibre
22	Cap	Cast Iron
23	Washer	Stainless Steel
24	Stuffing Box	Brass
25	Fork	Brass

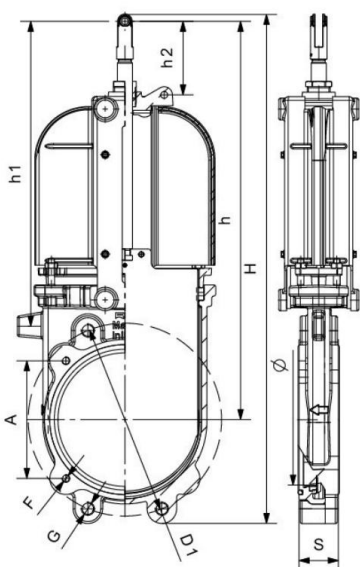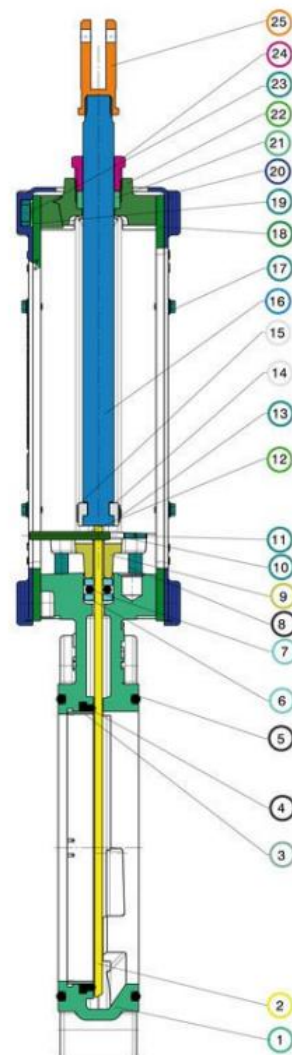

Pressure / Temperature Rating		
Pressure	4" - 6"	10 Bar
	8"	8 Bar
	10"	7 Bar
Temperature	- 20C (without liquid)	+ 90°C
	Max Pressure at room temp	23°C

**Standard Flange Connection PN10 or ANSI
AGRI Standard Square Flange
Valves are manufactured following European
Pressure Equipment Directive PED 97/23/CE**

DIMENSIONS											
DN	INCHES	H	h	S	F	A	D1	G	h1	PN	KG
100	4"	584	467	50	M12	150	180	M16	371	10 Bar	15.4
125	5"	616	483	50	M12	150	210	M16	377	10 Bar	16.5
150	6"	671	525	60	M12	150	240	M20	411	10 Bar	19.6
200	8"	671	607	60	M12	180	295	M20	465	8 Bar	25
250	10"	941	733	70			350	M20		7 Bar	53