


Quick exhaust valve - M5 - G1/8" - G1/4" - G1/2"


| |
|---------------|
| Ordering code |
| 6.02.1 |
| CONNECTION |
| 05 = M5 |
| 18 = G 1/8" |
| 14 = G 1/4" |
| 12 = G 1/2" |

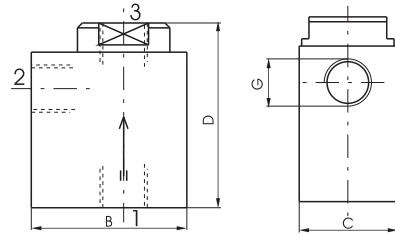

| | | | | |
|------------|----|------|------|------|
| G | M5 | 1/8" | 1/4" | 1/2" |
| B | 22 | 32 | 35 | 52 |
| C | 12 | 20 | 25 | 37 |
| D | 28 | 38 | 50 | 62 |
| Weight gr. | 50 | 62 | 112 | 310 |

| | | | | | |
|---|-------------|-----|------|------|------|
| Flow rate NI/min at 6 bar with $\Delta p = 1$ | from 1 to 2 | 120 | 480 | 960 | 3300 |
| Flow rate NI/min at 6 bar on free exhaust | from 2 to 3 | 220 | 1100 | 1930 | 6500 |


Weight "see table"



| | | | | |
|----------------------------|--------------|----------------------|-----------------------|------------|
| Operational characteristic | Fluid | Max working pressure | Operating Temperature | |
| | Filtered air | 10 bar | Min. -5°C | Max. +70°C |

Quick exhaust valve in line - M5 - M7 - G1/8"


| |
|-------------------|
| Ordering code |
| 6.02.1.C.L |
| CONNECTION (IN) |
| M5 = M5 |
| 03 = tube Ø3 |
| 04 = tube Ø4 |
| 06 = tube Ø6 |
| CONNECTION (OUT) |
| M5 = M5 |
| M7 = M7 |
| 18 = G1/8" |
| 04 = tube Ø4 |
| 06 = tube Ø6 |

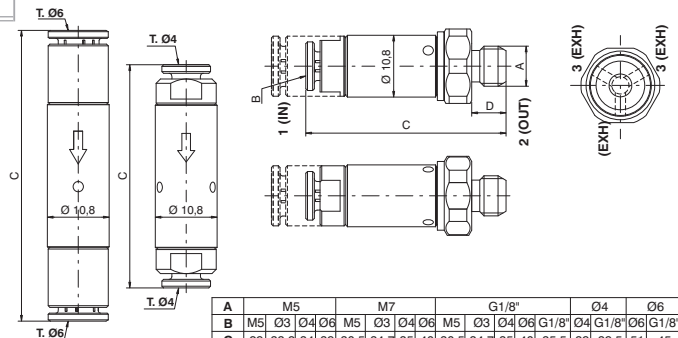

| | | | | | | | |
|---|-------------|-------------|-------------|----------|----------|----------|----------|
| A | M5 | M7 | G1/8" | | | Ø4 | Ø6 |
| B | M5 Ø3 Ø4 Ø6 | M5 Ø3 Ø4 Ø6 | M5 Ø3 Ø4 Ø6 | G1/8" Ø4 | G1/8" Ø6 | G1/8" Ø4 | G1/8" Ø6 |
| C | 29 33 34 39 | 30 34 35 40 | 30 34 35 40 | 35 40 | 35 40 | 39 51 | 45 |
| D | 4,5 | | 6 | | | 17 | 20 |

| | | | | | | | |
|---|-----|--|-----|--|--|-----|-----|
| Weight (gr) | 17 | | 18 | | | 17 | 20 |
| Flow rate NI/min at 6 bar with $\Delta p = 1$ (from 1 to 2) | 90 | | 110 | | | 90 | 110 |
| Flow rate NI/min at 6 bar on free exhaust (from 2 to 3) | 240 | | 350 | | | 240 | 350 |


Weight "see table"



| | | | | |
|----------------------------|--------------|----------------------|-----------------------|------------|
| Operational characteristic | Fluid | Max working pressure | Operating Temperature | |
| | Filtered air | 10 bar | Min. -5°C | Max. +70°C |

Exhaust flow control - M5 - G1/8" - G1/4" - G1/2"

| |
|---------------|
| Ordering code |
| 6.03.1 |
| CONNECTION |
| 05 = M5 |
| 18 = G 1/8" |
| 14 = G 1/4" |
| 12 = G 1/2" |

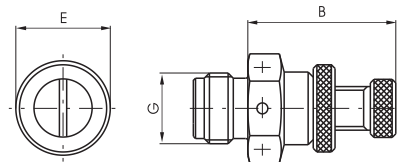

| | | | | |
|------------|----|------|------|------|
| G | M5 | 1/8" | 1/4" | 1/2" |
| B | 21 | 18 | 22 | 39 |
| E | 9 | 13 | 16 | 25 |
| Weight gr. | 10 | 18 | 32 | 155 |

Weight "see table"



| | | | | |
|----------------------------|--------------|----------------------|-----------------------|------------|
| Operational characteristic | Fluid | Max working pressure | Operating Temperature | |
| | Filtered air | 10 bar | Min. -5°C | Max. +70°C |